

SUNSTREAM

# FLOATLIFT



A woman with long, wavy hair and sunglasses is smiling and looking to the right. She is wearing a light-colored tank top. The background is a body of water. The entire image is overlaid with a semi-transparent blue filter. A thick yellow horizontal line is positioned above the text.

**FIRST BOAT  
IN THE WATER  
WINS.**

# SUNSTREAM HELPS YOU ENJOY YOUR BOAT MORE.

Boating is our passion and, like you, we envisioned a future that minimized the hassles and frustrations of getting your boat in and out of water, accessing the hull and covering the boat. For over 25 years, we've been leading the industry by elevating boating experiences all over the globe. Our award winning engineering and design continue to push the boundaries of what's possible by producing many of the world's first free-standing, free-floating hydraulic boat lifts and automatic cover systems. You're invited to the future of boating.

**Boat more, boat easier, boat better.**



FREE-STANDING  
HYDRAULIC LIFT



FREE-FLOATING  
HYDRAULIC LIFT



AUTOMATIC BOAT  
COVER SYSTEM



FLOATLIFT

# FLOATLIFT

## Free-floating Freedom

Sunstream's FloatLift combines exceptional engineering with style and accessibility. Streamlined pontoons effortlessly support the hull in nearly any location with as little as 12 inches of water under the boat keel/skeg. Now, the convenience of Sunstream can go wherever your boat goes. Where will you take it?

Slip into something comfortable.



### 1 Foam-Filled Floats

Unsinkable floats gives peace of mind that your boat is protected. The foam also enables the lift to support the boat on soft bottoms if the water drops.

### 2 Shallowest Water Floating Lift

When the frame is lowered, the boat typically only needs a few inches under the keel/skeg to clear this beam.

### 3 GravityLock™

The floats are locked in the up position with the wheels going over the top of this casting. Designed to prevent accidental lowering if a hose leaks.

### 4 Cylinders Over the Water

The cylinders are kept safe from the elements by being above water in the up position, and fully retracted.

Stainless shaft, polyurea coated body and scraper seal gives long life to the cylinders.

### 5 SuperBunks™

Sunstream's Superbunks are known as the best bunks in the industry for ideal boat fit, durability, softness on hull, distributed load, and shallow water.

### 6 Adjustable Bunk Brackets

Bunks are adjustable to best fit boat. Optional longer brackets are available for boats with deep skegs.

### 7 Guides

Lift comes standard with one set of guides. An additional set may be added for the front. The HoverCover can be added which extends from the guides and raises when the boat lowers.

### 8 Dock Line Ties

Lift can be tied to dock or mooring like a boat.

### 9 Spring Tie Line Location

Locations to secure Fore/aft lines.

### 10 Marine Grade Aluminum Frame


Built like an aluminum boat, with optional zincs for salt water use.

### 11 Stainless Steel Hardware

Lift is designed for long term durability in salt or fresh water.


### 12 Walk-on Floats

Access your hull and drives, with walk-on floats.

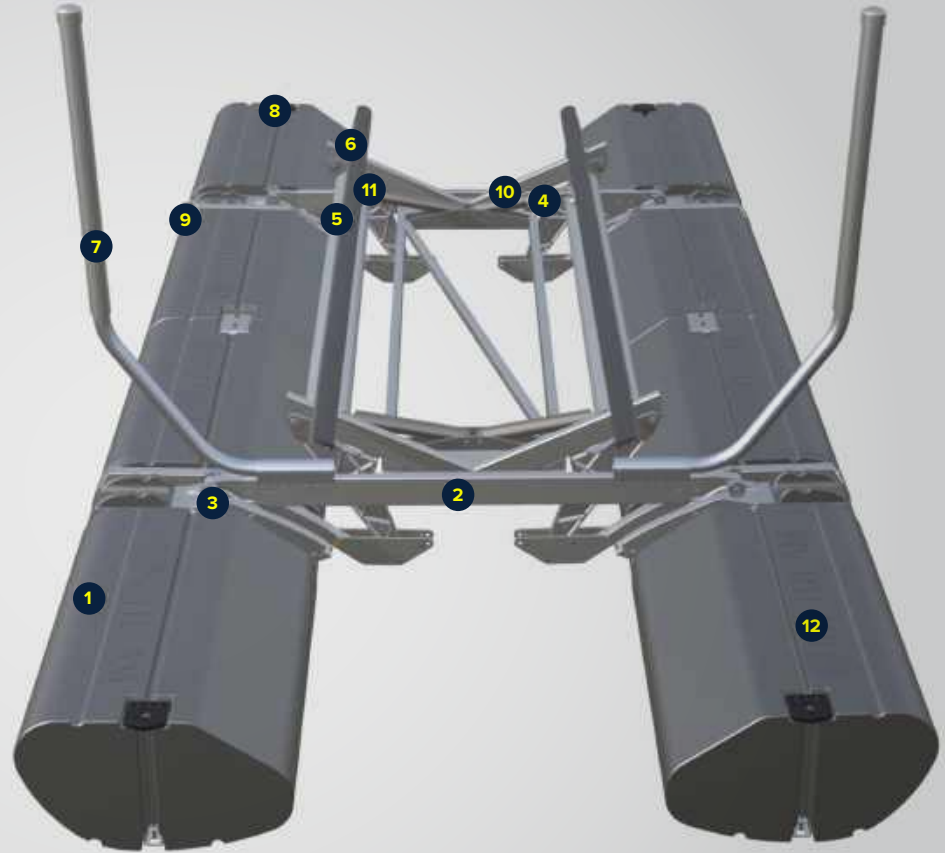


## HIGH PERFORMANCE HYDRAULICS

Sunstream's powerful hydraulics pull the floats under the boat in as little as 30 seconds with the remote control. Charge the DC system with AC or solar options for complete freedom. The cylinders are retracted above the water when raised and optional zincs protect any aluminum components in contact with the water.

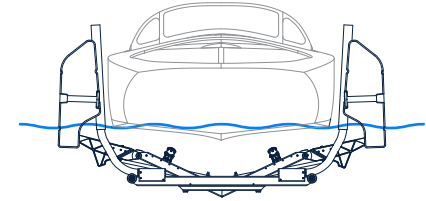


## QUALITY CONSTRUCTION

Rise to the top and stay there. The Floatlift's foam-filled polyethylene pontoons quickly lift your boat out of the water and the patented GravityLock™ designed to keep your boat safe and sound. Now it's easier to keep your boat looking its best with clear access to your hull and prop for cleaning and maintenance. The frame is marine-grade aluminum and fitted with stainless steel hardware, so you can boat in fresh or saltwater. The cylinders are retracted and above the water when raised and zincs protect the frame like an aluminum boat. No other lift is built like a Sunstream.

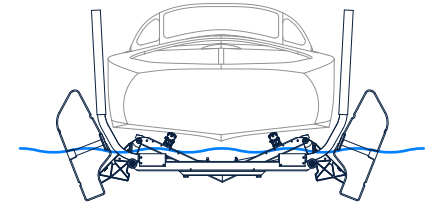

## SHALLOW WATER ACCESS

Designed to set you free, the FloatLift typically needs just 12" of water under the keel or skeg and the foam filled floats can support the boat on the soft seabed even if the tide goes out. FloatLift's low-profile floats split high waves so the lift can be used practically anywhere you would moor your boat. Powered by a solar option means you are ready for adventure anywhere.

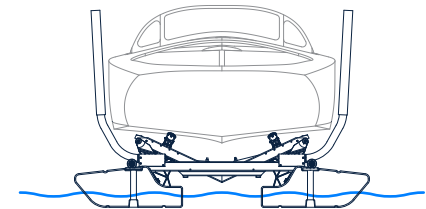



*Optional HoverCover shown*

## BLUETOOTH & APP

Sunstream's optional Bluetooth transmitter and smartphone app give you the power to lift your boat with your phone! It also gives important lift diagnostics to prevent a problem from becoming a problem. Bluetooth technology has more consistent range, and is more responsive. Built-in security features protect your boat.





## SWIFTSHIELD

Sunstream's SwiftShield automatic boat cover system helps you to use your boat more and protects your investment. Say farewell to the frustration that comes with traditional boat covers and hello to boating anytime you want. Be on the water in just 30 seconds with the push of a remote.



## GOVERNMENT

Sunstream applied aerospace technology to create the fastest, most reliable boat lift for commercial use on the market today.

Sunstream's high speed boat lifts meet the demand for small craft support in multi-agency, enforcement, search and rescue, fire, and commercial applications. Combining technology with superior customer service has made Sunstream the preferred brand for the most demanding market.



## MEDIUM

## LARGE

## X-LARGE

	FL6012D	FL7012D	FL10014D	FL13018D	FL13018D-W	FL15023D	FL15023D-W	FL24020D	FL36026D	FL40026D
<b>Capacity</b>	5500lb / 2495kg	7000lb 3175kg	10500lb 4763kg	13000lb 5897kg	13000lb 5897kg	15000lb 6804kg	15000lb 6804kg	24000lb 10886kg	36000lb 16344kg	40000lb 18143kg
<b>Lift Length</b>	20ft 6.1m	20ft 6.1m	24ft 7.32m	29ft 8.84m	29ft 8.84m	34ft 10.37m	34ft 10.37m	38ft 11.59m	44ft 13.42m	44ft 13.42m
<b>Lift Width Up Position</b>	10.5ft 3.23m	10.5ft 3.23m	11.9ft 3.38m	11.9ft 3.38m	13.3ft 4.08m	11.9ft 3.38m	13.3ft 4.08m	16ft 4.88m	16ft 4.88m	16ft 4.88m
<b>Weight</b>	1300lb 590kg	1600lb 725kg	2500lb 1134kg	2900lb 1315kg	3100lb 1406kg	3825lb 1737kg	3900lb 1771kg	8000lb 3632kg	9000lb 4086kg	9000lb 4086kg
<b>Launching Speed (approx)</b>	18sec	18sec	18sec	40sec	40sec	35sec	35sec	60sec	90sec	90sec
<b>Water Depth Required</b>	Draft + 12in 30cm	Draft + 12in 30cm	Draft + 12in 30cm	Draft + 12in 30cm	Draft + 12in 30cm	Draft + 12in 30cm	Draft + 16in 40cm	Draft + 20in 50cm	Draft + 20in 50cm	Draft + 20in 50cm
<b>Min Slip Width</b>	12ft 3.66m	13ft 3.96m	14ft 4.27m	14ft 4.27m	16ft 4.88m	14ft 4.27m	16ft 4.88m	22ft 6.71m	22ft 6.71m	22ft 6.71m
<b>Max Boat Beam</b>	8.5ft 2.62m	8.5ft 2.62m	10.5ft 3.23m	10.5ft 3.23m	12ft 3.66m	10.5ft 3.23m	12ft 3.66m	13.75ft 4.19m	14ft 4.27m	14ft 4.27m
<b>Allowable Draft for Typical V-Hull</b>	20-22in 50-55cm	20-22in 50-55cm	34in 86cm	34in 86cm	34in 86cm	34in 86cm	34in 86cm	40in 121cm	40in 121cm	40in 121cm

## HOVER COVER

## SWIFTSHIELD

U-Series Mechanism for FL10014D

	HC 24108	HC 30144	SS-AMU13124
<b>Length</b>	24ft 7.32m	30ft 9.14m	<b>Max Boat Beat</b> 9ft 4in
<b>Width Between Uprights</b>	106in 2.69m	Min 114in / 2.89m Max 126in / 3.2m	<b>Max Boat Length</b> 30ft
<b>Cover Material</b>	Sunbrella Canvas (Navy Standard)	Sunbrella Canvas (Navy Standard)	
<b>Lift Model</b>	FL6012	FL10014D FL13018D FL15023D	
<b>Max Boat Height w/o HC Extensions</b>	N/A	103in 2.61m	

# SUNSTREAM

## FLOATLIFT



**SUNLIFT SLX**  
Next-Gen  
Free-Standing Lift



**SWIFTSHIELD**  
Automatic  
Cover System



**SUNLIFT LEGACY**  
Original Hydraulic  
Free-standing Lift



**SUNPORT2**  
PWC Drive-On  
Dock

BOAT MORE,  
BOAT EASIER,  
**BOAT BETTER.**

[sunstreamboatlifts.com](http://sunstreamboatlifts.com)